Single-Stage Switches: **Vertical Mount**

Innovative Solutions

L001 & L002 Series:

Sub-Compact, Low-Cost Switches – Ideal for OEM Applications

Key Features:

- Ideal for confined spaces
- Broad media compatibility
- All polypropylene construction
- Switch rating (see below)
- 24" lead wires
- FDA approved material

L002

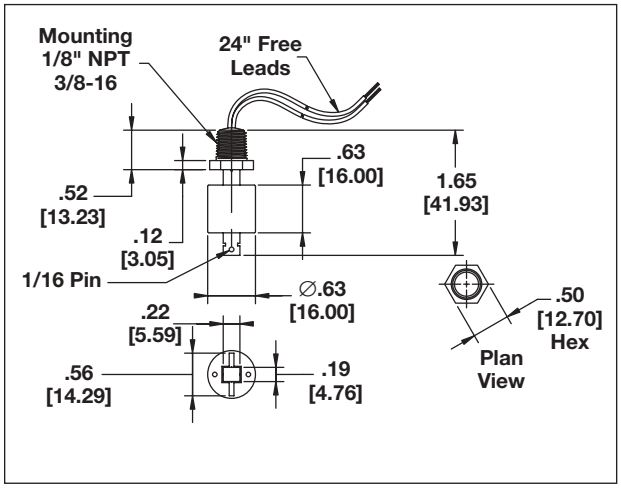

L001

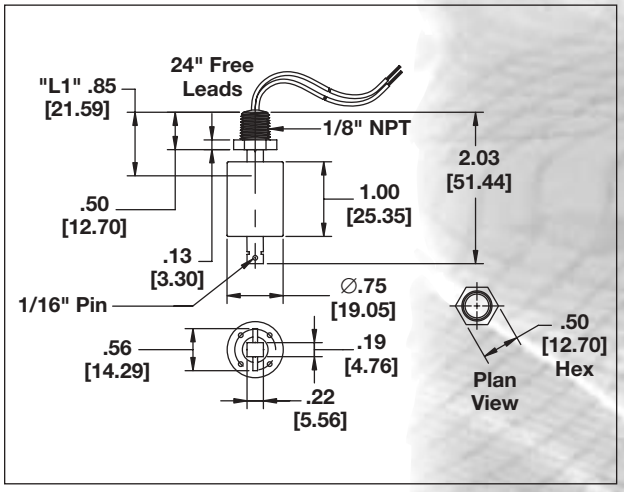

L002

Series	Mounting	Stem/Float Materials	SG	Temperature	Pressure	P/N	Switch
L001*	⅛" NPT	Solid/PP	1.0	-40° to +150° F	150 psig	L001-0102-0301	10 VA
L001*	⅜"-16	Solid/PP	1.0	-40° to +150° F	150 psig	L001-1702-0301	10 VA
L002	⅛" NPT	Solid/PP	0.8	-40° to +150° F	150 psig	L002-0102-0303	50 VA
L002	⅜"-16	Solid/PP	0.8	-40° to +150° F	150 psig	L002-1702-0303	50 VA

SG refers to recommended minimum liquid specific gravity
*When ordering please specify switch operation N.O. (Normally-Open) or N.C. (Normally-Closed) dry.