



# Single-Stage Switches: **Horizontal Mount**

**Innovative Solutions**



## **L090 Series** Highly Buoyant, Low-Cost Switches


### Key Features:

- No-leak construction
- Side-wall mounting: internal
- Broad media compatibility
- Operates on falling or rising level
- Selectable to Normally-Open or Normally-Closed operation by inverting the float
- Optional floats, mounts, and configurations available
- 50 VA SPST switch (standard)




**L090 with Buna-N Float**

**L090 with Stainless Steel Float**

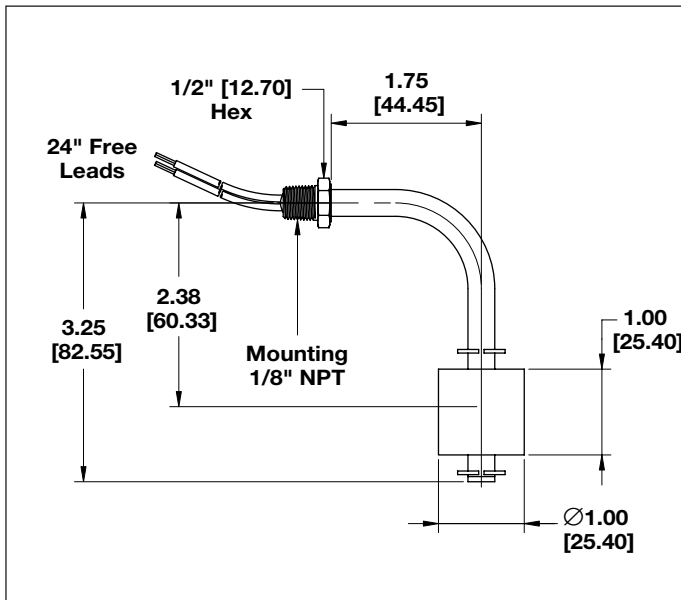

**L090 with Buna-N Float**

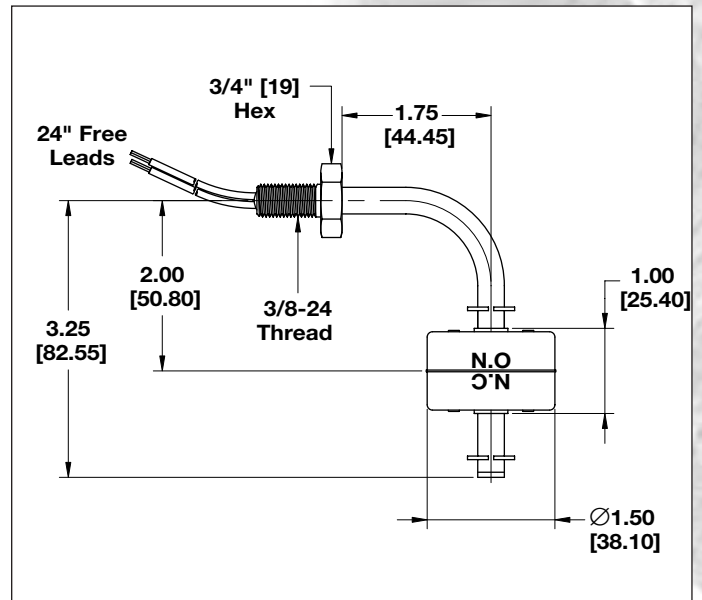

**L090 with Stainless Steel Float**

Series	Mounting	Stem/Float Materials	SG	Temperature	Pressure	P/N
<b>L090</b> <b>Highly Buoyant, Low-Cost Switches</b>	1/8" NPT	Brass/Buna	.80	-40° to +180° F	150 PSIG	L090-0101-2003
	1/8" NPT	SS/Buna	.80	-40° to +180° F	150 PSIG	L090-0108-2003
	1/8" NPT	SS/SS	.70	-40° to +300° F	100 PSIG	L090-0108-0803
	3/8"-24	Brass/Buna	.80	-40° to +180° F	150 PSIG	L090-1801-2003
	3/8"-24	SS/Buna	.80	-40° to +180° F	150 PSIG	L090-1808-2003
	3/8"-24	SS/SS	.70	-40° to +300° F	100 PSIG	L090-1808-0803

SG refers to recommended minimum liquid specific gravity